

AB1Q and AB2Q Round & Square EasyLED Bollards



The LEPG AB1Q and AB2Q LED Cutoff Bollards with UV-stabilized polycarbonate lenses and sealed optical compartments are designed to replace HID lighting systems up to 70w MH or HPS. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

Specifications and Features:

Housing: Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat, Dome or Pyramid Tops, Internal Driver Tray for Easy Maintenance.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP66 Sealed LED Compartment.

Finish: Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Reflector: Reflective White UV-Stabilized Polycarbonate Cone Reflector

Lens: Clear UV-Stabilized Polycarbonate or SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens.

Mounting Options: Mounting Kit with 8" Anchor Bolts, Included.

EasyLED LED: Aluminum Boards


Wattage: Array: 23w, System: 27w; (70w HID Equivalent)

Driver: Electronic Driver, 120-277V, 50/60Hz or 347V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV, 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls: Fixtures Ordered with Factory-Installed Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty: 5-Year Warranty for -20°C to +40°C Environment.

Order Information:

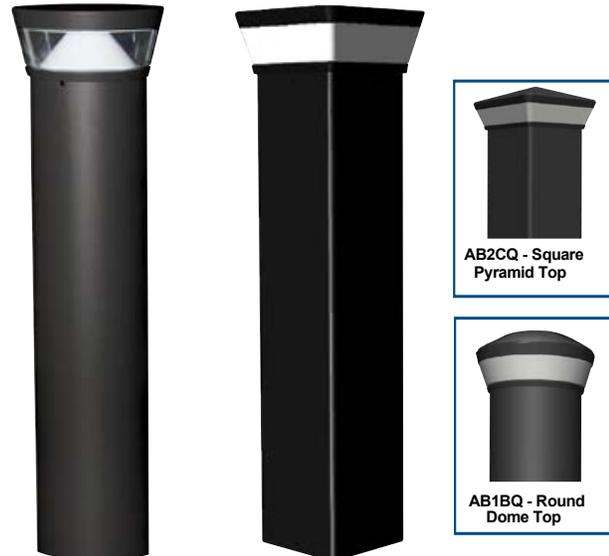

AB1Q - Round Flat Top (Clear Lens)

AB2Q - Square Flat Top (LumaLens)

AB2CQ - Square Pyramid Top

AB1BQ - Round Dome Top




Shown with "S3" Sensor



Shown with GFCI

Dimensions

Width (B)	9 1/4" (234mm)
Diameter (D)	7" (180mm)
Height (A)	Flat Top: 35 3/4" (908mm)
	Dome Top: 38 1/4" (968mm)
	Pyramid Top: 38 1/4" (968mm)

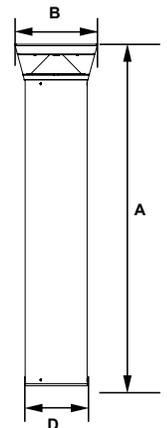

Model	Optic	Wattage	Driver	CCT	Lens	Color	Height	Options
	F=WBS	1X23=23w						
AB1Q=Round Bollard, Flat Top AB1BQ=Round Bollard, Dome Top AB2Q=Square Bollard, Flat Top AB2CQ=Square Bollard, Pyramid Top	F=Wide Beam Spread	1X23=23w	U=120-277V C=347V	3K=3000K* 4K=4000K *B2Q model only.	C=Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens	Z=Bronze B=Black C=Custom (Consult Factory)	(Leave Blank)= 34 3/4" Standard Height 30=30" Height	SF=Single Fuse (120-277V Only) DF=Double Fuse (120-277V Only) SP=Surge Protection GF1=GFCI Outlet, 15A, 120V S3=Internal Microwave Sensor (120-277V Only)

Accessories & Replacement Parts:







Mounting Accessories (Order Separately, Field Installed)	
BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts
BREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all LEPG Bollards. Die Cast with Powdercoat Finish, Hardware Included: 1 1/2" Dia. x 1 1/2" H *Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)

Accessories (Order Separately, Field Installed)	
P17122	Remote Programming Tool for P17121

Replacement Parts (Order Separately, Field Installed)	
P17121	Internal Microwave Sensor (120-277V Only)
BORBASE*	Die Cast Base Plate with Powdercoat Finish Over a Chromate Conversion Coating. Fits B1.
BOSBASE*	Die Cast Base Plate with Powdercoat Finish Over a Chromate Conversion Coating. Fits B2.
BOADP1	Adapter Plate with Gaskets for Outlet Boxes. Fits LEPG Round Bollards. Die Cast with Bronze Powdercoat Finish. *Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)

*Shown Mounted

Photometric Data

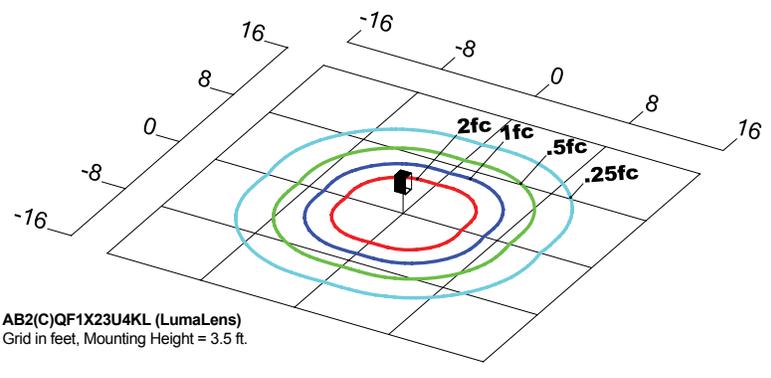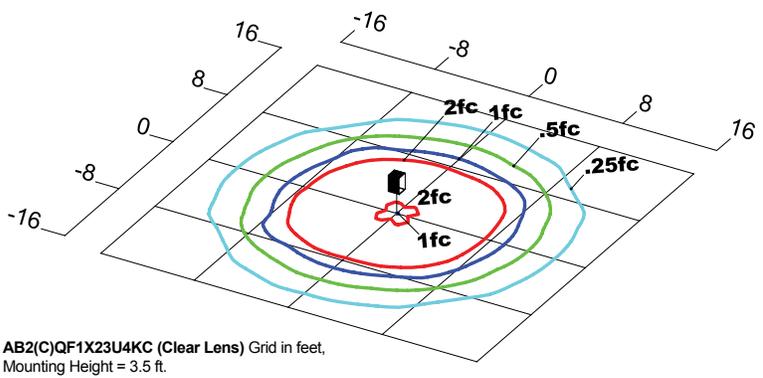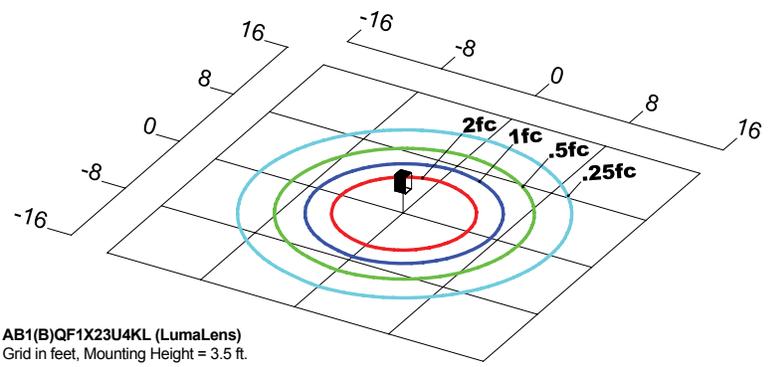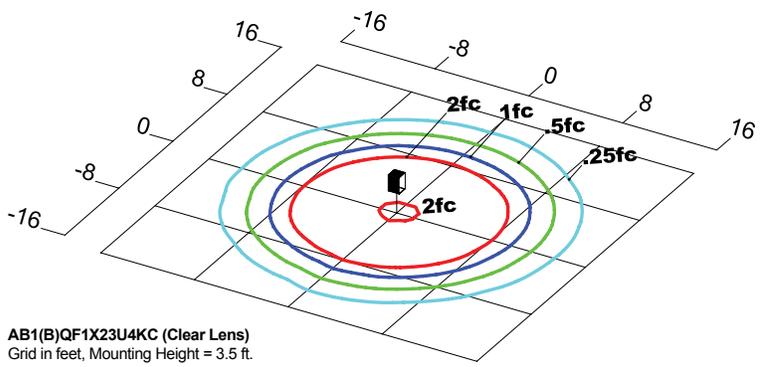



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Bollards	4000 CCT 80 CRI					3000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 23w	116	27	B1Q (Clear Lens)	2,093	78	1	3	1	-	-	-	-	-
			B1Q (LumaLens)	1,338	50	1	3	1	-	-	-	-	-
			B2Q (Clear Lens)	2,133	79	1	3	1	1,966	73	1	3	1
			B2Q (LumaLens)	1,287	48	1	3	1	1,187	44	1	3	1

Projected Lumen Maintenance

Data shown for 4000 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
B1 L70 Lumen Maintenance @ 25°C / 77°F	27	1.00	0.93	0.86	0.72	106,000
B2 L70 Lumen Maintenance @ 25°C / 77°F	27	1.00	0.93	0.86	0.72	106,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
B1 L70 Lumen Maintenance @ 50°C / 122°F	27	1.00	0.91	0.83	0.66	88,000
B2 L70 Lumen Maintenance @ 50°C / 122°F	27	1.00	0.91	0.83	0.66	88,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
B1 L80 Lumen Maintenance @ 40°C / 104°F	27	1.00	0.92	0.84	0.67	61,000
B2 L80 Lumen Maintenance @ 40°C / 104°F	27	1.00	0.92	0.84	0.67	61,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.