

ECAXTE

Chicago Approved LED Exit Signs



ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination
- Single or double face configurations

ELECTRICAL

- Dual 120V/277V
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing
- Long-life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING OPTIONS

- Side and back KO's provided for mounting convenience
- Canopy provided for universal (top, side or back) mounting

HOUSING

- 20-gauge steel housing
- Neutral white finish

WARRANTY & LISTINGS

- UL listed for damp locations (0°-50°C/32°F-122°F standard)
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes
- Meets city of Chicago requirements
- Five year warranty on all electronics and housing
- Batteries pro-rated for five years


ORDERING INFORMATION

M: **#FACES:** **BC:** **HC:** **BATTERY:** **OPTIONS:**

MODEL	# FACES	LETTER/ BACKGROUND COLOR	HOUSING COLOR	BATTERY	OPTIONS
ECAXTE	1 = SINGLE 2 = DOUBLE	RW = RED ON WHITE	A = ALUMINUM W = WHITE	BLANK = AC ONLY EM - NI-CD BATTERY	ENA = EXIT, no arrow ESWNA = STAIRS, no arrow EDA = EXIT, double arrow ESWDA = STAIRS, double arrow ERA ¹ = EXIT, right arrow ESWRA ¹ = STAIRS right arrow ELA ¹ = EXIT, left arrow ESWLA ¹ = STAIRS, left arrow ELARA ² = EXIT, left/right arrow ESWLARA ² = STAIRS, left/right arrow Notes: ¹ Available in single face configuration only ² Available in double face configuration only
08.2019					



DIMENSIONS

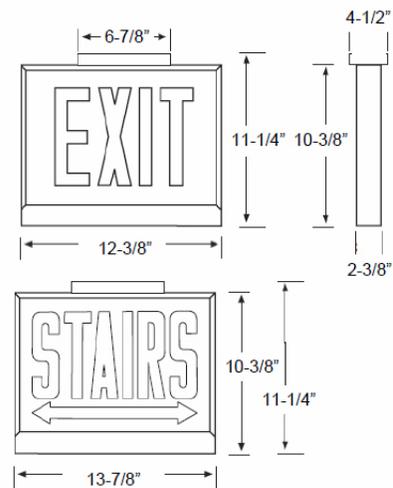

Electrical information

	Supply Voltage	Max. Watts	Max Amps
All models	120V/277V	5.0W	.10A/.05A