

## ECTXTEU

### Thin Exit & Emergency Combo

#### ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- One 1.1W white LED per lamphead.
- Unique all-inclusive lamp, reflector and lens assembly.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long life ultra-bright, energy efficient Red or Green LED EXIT sign illumination.

#### ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

#### HOUSING


- Specification-grade, low profile thin plastic design.
- Patent-pending, field selectable universal single/double face configuration.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.

#### OPTIONS

- HL: Provides increased center-to-center spacing (2.0W per head).
- RC: Remote capacity of up to 2.0 watts.



#### DIMENSIONS

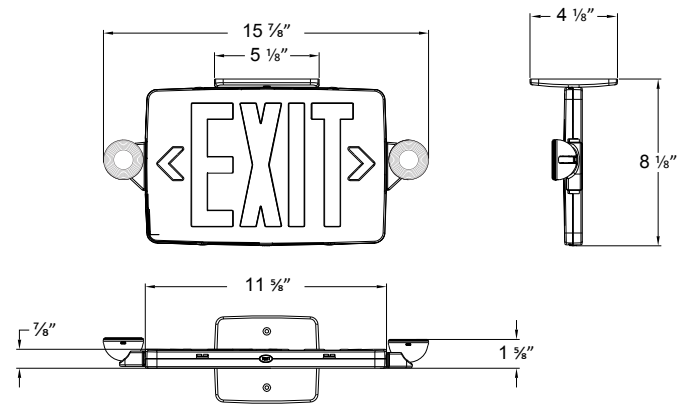

#### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 regulations

#### STANDARD



#### OPTIONAL



#### ORDERING INFORMATION

Sample Part Number: **ECTXTEU**

#### NOTES:

<sup>1</sup> -HL and -RC options cannot be combined.

PART#	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS <sup>1</sup>
ECTXTEU	3 Universal Single/ Double Face	R Red G Green	W White B Black	HL High Lumen RC Remote Capacity

ELECTRICAL INFORMATION

PART#	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
ECTXTEU	1.2	1.2	0.092	0.092

REMOTE LAMP COMPATIBILITY

PART#	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY										
			RHLED-MV	RH16LED	RH16		RH		RHR		SRH		SRHLED
			X		6V	12V	6V	12V	6V	12V	6V	12V	
ECTXTEU-RC	3.6V	2W											