

EFE Series


RESIDENTIAL EUROSTYLE

FEATURES:


- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount Only
- Mounting Hardware Included




EFE101

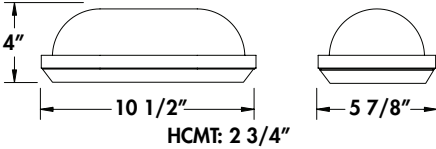


EFE102

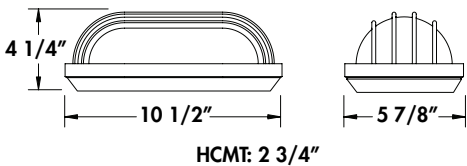

EFE103

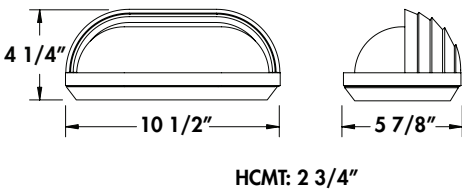

EFE104

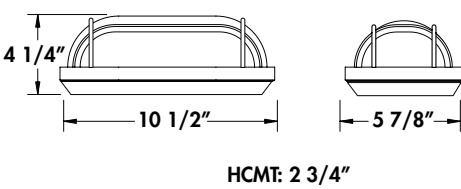

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFE101 EFE102 EFE103 EFE104	INCANDESCENT 120V Incandescent Medium Base, 120V I60-1 X 60W Max	W-White B- Black	POLYCARBONATE F-Frosted	S-Security Motion Sensor & Photocell Combo. 120V only LED LAMP, 3 YEAR WARRANTY DIMMABLE LWE-A19/E26, 80CRI, 3000K LCE-A19/E26, 80CRI, 4000K

EFE111 & EFE113


COMMERCIAL EUROSTYLE

FEATURES:


- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Aluminum Base
- Wall Mount Only
- Mounting Hardware Included



EFE111

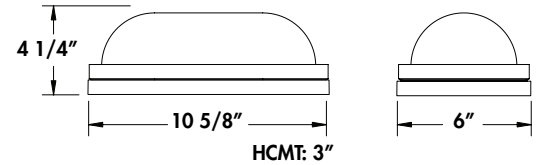

EFE113

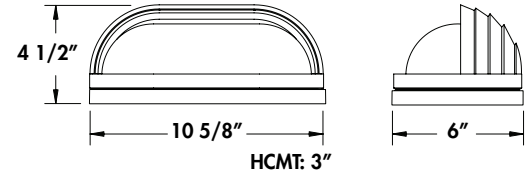

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFE111 EFE113	LE800: - 13W, 80 CRI 88 Lumens Per Watt** W-1140lm 3000K C-1280lm 4000K DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 Hrs L70, Ambient OP Temp. -40°C TO +40°C, 5 Year Limited Warranty, Dimmable	W-White B- Black	POLYCARBONATE F-Frosted	P-Photocell 120V only. S-Security Motion Sensor & Photocell Combo. 120V only.
	L900: - 11.3W Power Input CRI 74 (TYP) C-912lm 4000K 80 Lumens Per Watt** MULTI-VOLT 120-277V LED: Multi-Volt LED 120-277V, 50/60 Hz, Constant Current at 700mA, Driver UL Class 2, HPF, Thermally Protected Array, 50,000 HRS L70* Ambient OP Temp. -40°C TO +40°C, 3 Year Warranty			S-Security Motion Sensor & Photocell Combo

EFE112 & EFE114


COMMERCIAL EUROSTYLE

FEATURES:


- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Aluminum Base
- Wall Mount Only
- Mounting Hardware Included



FE114

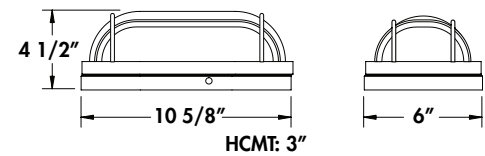

FE112

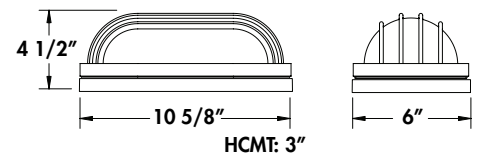

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFE112 EFE114	L900: - 180 Lumens Per Watt**1.3W C-912lm 4000K Power Input CRI 74 (TYP) MULTI-VOLT 120-277V LED: Multi-volt LED 120-277V, 50/60 Hz, Constant Current at 700mA, Driver UL Class 2, HPF, Thermally Protected Array, 50,000 HRS L70* Ambient OP Temp -40°C to +40°C, 3 Year Warranty	W -White B - Black	POLYCARBONATE F -Frosted	S -Security Motion Sensor & Photocell Combo. See page 16.
	LE800: - 13W, 80 CRI 88 Lumens Per Watt** W-1140lm 3000K C-1280lm 4000K DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 Hrs L70, Ambient OP Temp -40°C TO +40°C, 5 Year Warranty, Dimmable	W -White B - Black	POLYCARBONATE F -Frosted	P -Photocell 120V only. See page 18 for details. S -Security Motion Sensor & Photocell Combo. 120V only. See page 16.