
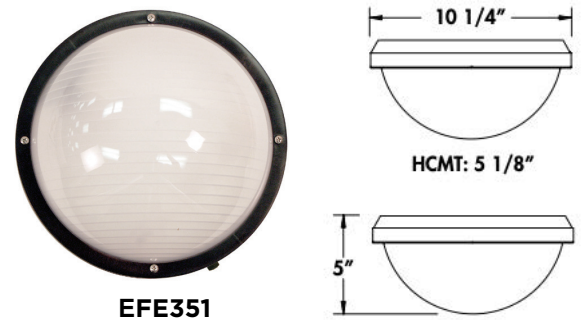
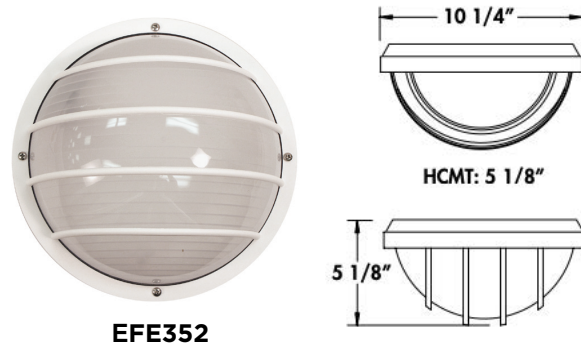


EFE35 Series

RESIDENTIAL EUROSTYLE

FEATURES:

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting

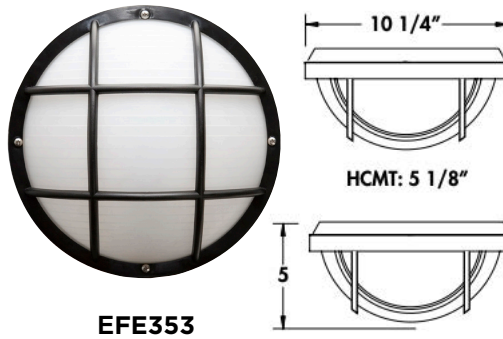

ORDERING GUIDE:

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFE351 EFE352 EFE353	INCANDESCENT 120V: Incandescent Medium Base, 120V I75-1 X 75W Max	W-White B- Black	POLYCARBONATE F-Frosted	S-Security Motion Sensor & Photocell Combo. 120V only. See page 16. LED LAMP, 3 YEAR WARRANTY DIMMABLE LWE-A19/E26, 80CRI, 3000K LCE-A19/E26, 80CRI, 4000K

EFE361 Series



RESIDENTIAL EUROSTYLE

FEATURES:

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting



DIMENSIONS:

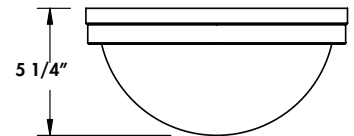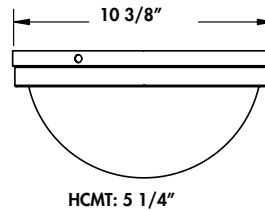

ORDERING INFORMATION:

MODEL	LIGHT SOURCE		BODY	DIFFUSER	OPTIONS
EFE361					
EFE361	LE800 - 13W, 80 CRI >88 Lumens Per Watt**	W-1140lm 3000K C-1280lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	P- Photocell 120V only.
	LE1200 - 14W, 80 CRI >102 Lumens Per Watt**	W-1430lm 3000K C-1500lm 4000K			S- Security Motion Sensor & Photocell Combo. 120V only.
	LE1800 - 22W, 80 CRI >88 Lumens Per Watt**	W-1950lm 3000K C-2130lm 4000K			
	DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 Hrs L70, Ambient OP Temp. -40° C TO +40° C, 5 Year Limited Warranty, Dimmable				
	L1800 - 22W, 80 CRI CRI 74 (TYP)	W-1704lm 3000K C-1824lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	S- Security Motion Sensor & Photocell Combo. See page 16.
	MULTI-VOLT 120-277V LED: Multi-Volt 120~277V, 50/60 Hz, Constant Current 700mA, Driver UL Class 2, HPF, Thermally Protected Array, 50,000 HRS L70* Ambient OP. Temp. -40° C TO +40° C, 3 Year Warranty				

EFE362 Series


COMMERCIAL EUROSTYLE

FEATURES:


- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting



DIMENSIONS:

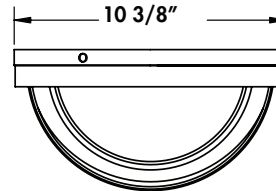

HCMT: 5 1/4"

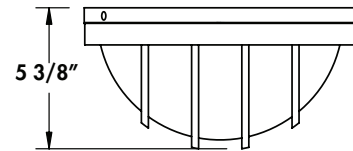

ORDERING INFORMATION:

MODEL	LIGHT SOURCE		BODY	DIFFUSER	OPTIONS
EFE362					
EFE362	LE800 - 13W, 80 CRI >88 Lumens Per Watt** LE1200 - 14W, 80 CRI >102 Lumens Per Watt** LE1800 - 22W, 80 CRI >88 Lumens Per Watt** <i>DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 Hrs L₇₀, Ambient OP Temp. -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE</i>	W -1140lm 3000K C -1280lm 4000K W -1430lm 3000K C -1500lm 4000K W -1950lm 3000K C -2130lm 4000K	W -White B - Black	POLYCARBONATE F -Frosted	P - Photocell 120V only. See page 18 for details. S - Security Motion Sensor & Photocell Combo. 120V only. See page 14.
	L1800 - 22W, 80 CRI CRI 74 (TYP)	W -1704lm 3000K C -1824lm 4000K <i>MULTI-VOLT 120-277V LED: Multi-Volt LED 120-277V, 50/60 Hz, Constant Current at 700mA, Driver UL Class 2, HPF, Thermally Protected Array, 50,000 Hrs L₇₀*, Ambient OP Temp. -40°C TO +40°C, 3 Year Warranty</i>			

EFE363 Series



COMMERCIAL EUROSTYLE

FEATURES:

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting



DIMENSIONS:

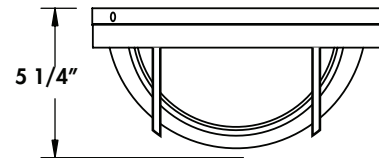

HCMT: 5 1/4"

ORDERING INFORMATION:

MODEL	LIGHT SOURCE		BODY	DIFFUSER	OPTIONS
EFE363					
EFE363	LE800 - 13W, 80 CRI >88 Lumens Per Watt**	W -1140lm 3000K C -1280lm 4000K	W -White B - Black	POLYCARBONATE F -Frosted	P - Photocell 120V only. See page 18 for details. S - Security Motion Sensor & Photocell Combo. 120V only. See page 14. EB - Emergency Backup See page 123.
	LE1200 - 14W, 80 CRI >102 Lumens Per Watt**	W -1430lm 3000K C -1500lm 4000K			
	LE1800 - 22W, 80 CRI >88 Lumens Per Watt**	W -1950lm 3000K C -2130lm 4000K			
<i>DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 Hrs L₇₀, Ambient Op. Temp -40° C TO +40° C, 5 YYear Warranty, Dimmable</i>					
	L1800 - 22W, 80 CRI CRI 74 (TYP)	W -1704lm 3000K C -1824lm 4000K	W -White B - Black	POLYCARBONATE F -Frosted	S -Security Motion Sensor & Photocell Combo. See page 16.
<i>MULTI-VOLT 120-277V LED: Multi-Volt LED 120-277V, 50/60 Hz, Constant Current at 700mA, Driver UL Class 2, HPF, Thermally Protected Array, 50,000 Hrs L₇₀*, Ambient OP Temp. -40° C TO +40° C, 3 Year Warranty</i>					