

EINDCWLEZU

All LED NEMA4X/NSF Exit & Emergency Combo

ILLUMINATION

- Two fully adjustable, ultra bright 3.6 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 16V/12V maintenance-free, rechargeable NiCd battery (12W, 15W models).
- Offers 4.8W, 7.8W, 20.8W of remote capacity (6V/12V DC output) standard on the 12W, 15W and 28W models.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount.
- Knockout's provided for conduit feed applications.

HOUSING

- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-20°C - 50°C).
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- NH: No lamp heads attached to the unit enabling it to be used as a remote capable EXIT sign.

ORDERING INFORMATION

PART#	No. of FACES	LETTER COLOR	VOLTAGE	WATTAGE	HOUSING COLOR	OPTIONS
EINDCWLEZU	1 Single ¹	R Red	6 6 volts	12 12 watts	W White	SDT Self-Diagnostics
	2 Double ²	G Green	12 12 volts	15 15 watts	B Black	CW Cold Weather ³
				28 28 watts		TP Tamper-Proof
						NH No Heads


¹ Available only in 15W & 28W models.

² Available only in 12W models.

³ Available only in 12W & 15W models.



DIMENSIONS

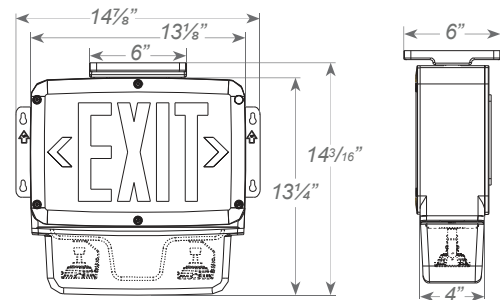

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries prorated for two (lead acid) / five (NiCd) years.
 - Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
 - IP66 rated for Ingress protection.
 - NEMA4X rated.
- UL certified for use in food service operations.
 UL listed for wet locations (0°C - 50°C on 12W / 15W and 10°C -40°C on 28W models).

STANDARD



OPTIONAL



Sample Part Number: **EINDCWLEZU**

ELECTRICAL INFORMATION

PART#	INPUT WATTS (W)	INPUT AMPS (A)	
	120V/277V	120V	277V
EINDCWLEZU (GREEN)	12	0.12	0.05
EINDCWLEZU (RED)	12	0.12	0.05