

EINDWLEZU

NEMA4X/NSF Exit Sign

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- UniTue bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.BV long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount

HOUSING


- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.



DIMENSIONS

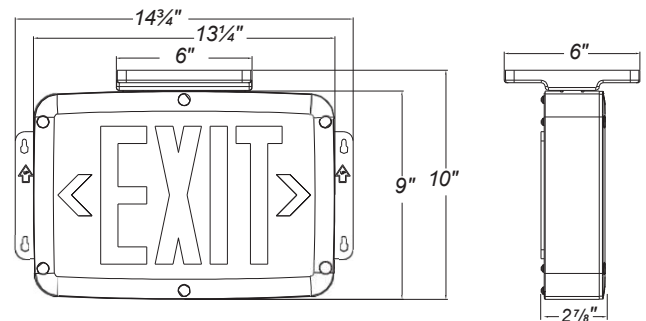

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries prorated for five years.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- NEMA4X and NSF rated.
- Certified to CEC under Title 20 Regulations.
- UL certified for use in food service operations.
- UL listed for wet locations (-20°C - 50°C).

STANDARD



OPTIONAL



ORDERING INFORMATION

Sample Part Number: **EINDWLEZU1RBEMSDT**

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY		OPTIONS	
EINDWLEZU	1	Single	R	Red	W	White	(blank)	AC-Only	SDT	Self-Diagnostics ¹
	2	Double	G	Green	B	Black	EM	NiCd Battery	2C-120	Dual Circuit With 120V Input ²
									2C-277	Dual Circuit With 277V Input ²
									TP	Tamper-Proof

¹ Available in EM units only.

² Not available with EM units.

OPTIONS

CATALOG NUMBER	INPUT WATTS (W)	INPUT AMPS (A)	
	120V/277V	120V	277V
EINDWLEZU (GREEN)	2.5	0.025	0.010
EINDWLEZU (RED)	2.5	0.025	0.010