

## EEM7-PLED

### Recessed LED Emergency Unit

#### ILLUMINATION

- Two fully adjustable 1.0W white LED lamp heads.
- High performance chrome-plated metal reflectors and plastic lens for optimal light distribution.

#### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 10W standard.

#### MOUNTING

- Bar hangers on the back box for recessed mount.
- Compatible with drop ceiling mount installations. Bar hangers included.

#### HOUSING

- Durable 20-gauge steel trim plate in white or black finish.
- Trim securely attached to housing with spring clips.


#### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for dry locations. (25°C)

#### STANDARD



#### DIMENSIONS

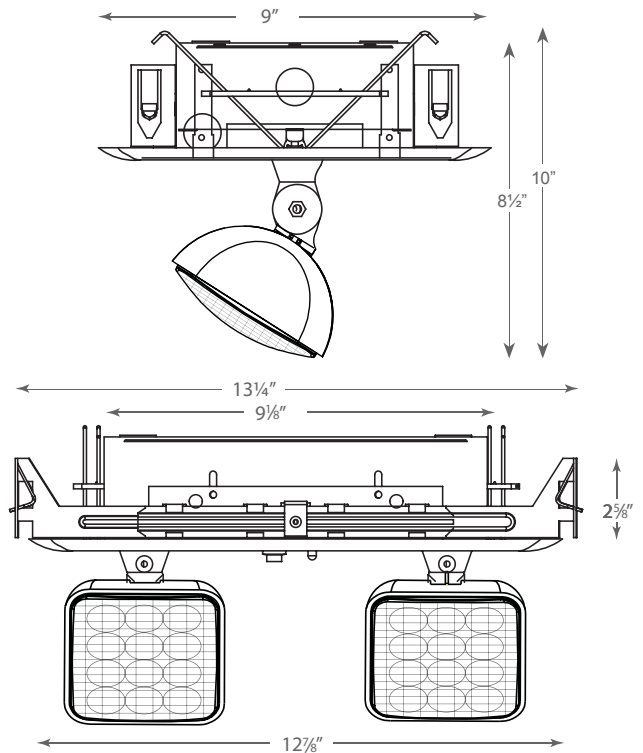

#### ORDERING INFORMATION

Sample Part Number: **EEM7-PLED**

PART#	HOUSING COLOR	
	(blank)	White
EEM7-PLED	B	Black

## ELECTRICAL INFORMATION

PART#	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EEM7-PLED	5.0	5.0	0.05	0.03

## REMOTE LAMP COMPATIBILITY

PART#	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
EEM7-PLED	6V	10W			X	X	X		X		X		X		X