

ENYELXTEU


New York City Compliant
Edgelit Aluminum Exit Sign

- ILLUMINATION
- Ultra bright, energy efficient, long life Red LEDs.
 - UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
 - Double face utilizes factory installed silver or white mylar background panel.
 - New York City compliant 8" EXIT letters.
- ELECTRICAL
- Dual 120/277 voltage standard.
 - Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
 - 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
 - Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
 - Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

- MOUNTING
- Aluminum mounting canopy included for top, end or back mount. Available in optional black or white powder-coated finishes.

- HOUSING
- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
 - Self-adhesive Chevron appliques and guide template provided for directional indication.

- OPTIONS
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
 - SPV: UL Listed for 208/220/240 Volt, 50/60Hz.

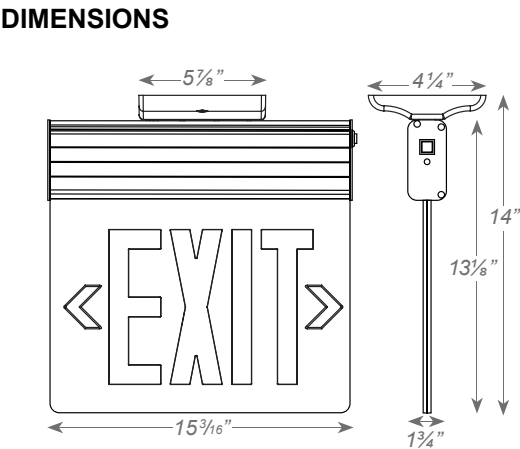

- WARRANTY / LISTING
- Five year warranty on all electronics and housing. Battery prorated for five years.
 - Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 - UL Listed for damp locations (0°C - 50°C).
 - Certified to CEC under Title 20 Regulations.

STANDARD				OPTIONAL	
					
					

ORDERING INFORMATION

Sample Part Number: ENYELXTEU

PART#	No. of FACES		LETTER COLOR		PANEL		HOUSING COLOR		BATTERY		OPTIONS	
ENYELXTEU	1	Single Face	R	Red	C	Clear ¹	W	White	(blank)	AC-Only	SDT	Self-Diagnostics ²
	2	Double Face			M	Mirror	B	Black	EM	Battery Backup	SPV	208/220/240 Volt, 50/60Hz ³
					W	White	A	Aluminum				

¹ With single face only.

² Available only with EM units.

³ Not available with SDT.

ELECTRICAL INFORMATION

PART#	INPUT WATTS (W)					INPUT AMPS (A)				
	120V	277V	208V	220V	240V	120V	277V	208V	220V	240V
ENYELXTEU/EM/SPV	3.6	4.0	3.9	3.93	3.98	0.030	0.020	0.023	0.022	0.021
ENYELXTEU/SDT	3.6	4.0	-	-	-	0.030	0.020	-	-	-