

ENYRELZXTE

New York City Approved
 Recessed Aluminum LED Edgelit Exit Sign

ILLUMINATION

- Ultra bright, energy efficient, long life Red LED.
- UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.
- Wall mount capability optional.

HOUSING


- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. Available in black or white powder-coated finishes.
- Self-adhesive chevron appliques and guide template provided for directional indication.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- SPV: UL Listed for special voltage option.
- WM: Allows for the unit to be wall recessed mounted.



DIMENSIONS

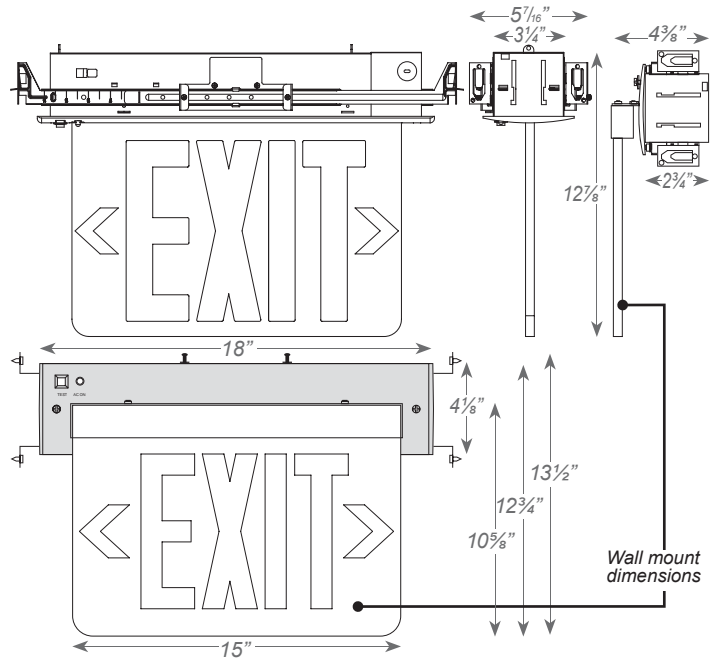

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

STANDARD

OPTIONAL



ORDERING INFORMATION

Sample Part Number: **ENYRELZXTE**

PART#	No. of FACES		LETTER		PANEL		TRIM PLATE		BATTERY		OPTIONS	
ENYRELZXTE	1	Single Face	R	Red	C	Clear ¹	W	White	Blank	AC Only	SDT	Self-diagnostics ³
	2	Double Face			M	Mirror	B	Black	EM	Battery Backup	SPV	208/220/240 Volt, 50/60Hz ²
					W	White	A	Aluminum			WM	Wall Mount ¹

Notes:

1. With single face only

2. Not available with SDT options

3. Available on EM units only

2025.06

ELECTRICAL INFORMATION

PART#	INPUT WATTS (W)					INPUT AMPS (A)				
	120V	277V	208V	220V	240V	120V	277V	208V	220V	240V
ENYRELZXTE/EM/SPV	3.6	4.0	4.01	4.07	4.21	0.030	0.020	0.023	0.022	0.021
ENYRELZXTE/SDT/2C	3.6	4.0	-	-	-	0.030	0.020	-	-	-