

## EPLEX50

Low Profile Exit Solution



### Specifications: Internal

The EPLEX50 is 100% reliable, there are no internal parts to fail. It is a non-toxic, non-radioactive low profile exit solution. The EPLEX50 is visible at up to 50 feet.


### Specifications: External

Construction: ABS plastic with photoluminescent panel. The EPLEX50 can be used for high and/or low level installations and has a 25 year life expectancy. It is visible at 50 feet during a blackout condition. The EPLEX50 meets current building codes, NFPA Life Safety Code 101 and OSHA requirements; International Building Code 2009; International Fire Code 2009. Universal bracket allows for ceiling and flag mount installation.

### Specifications: Electrical

**CIRCUIT:** Since there is no electricity required, the EPLEX50 is a safer signage solution, which saves on maintenance and energy costs.

**INSTALLATION:** Before installation it must be determined that there is a minimum of 5 Fc of LED, Fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

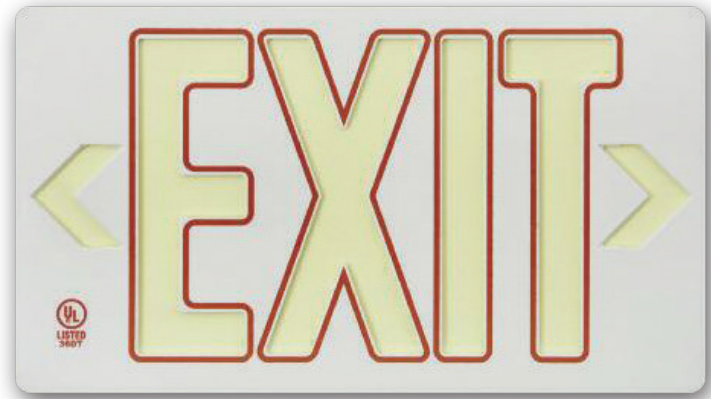

### Specifications: Mechanical

The EPLEX50 series utilizes photoluminescent technology which absorbs and stores ambient light. It is a non-toxic, and non-radioactive low profile emergency lighting solution. The EPLEX50 features field adjustable chevrons and is constructed of ABS plastic with photoluminescent panel. The EPLEX50 is NON-TOXIC and NON-RADIOACTIVE which eliminates disposal fees.

### Warranty

The EPLEX50 Series comes with a 10 to 20 year factory warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

### Dimensions



### Ordering Information

Product Number: EPLEX50

FN:

FC:

LO:

M:

Series	Face No.	Frame Color	Lettering Outline	Mounting
EPLEX50	P1 (single)	R (red) <sup>1</sup>	G (green)	UB (universal mounting bracket)
	P2 (double)	G (green) <sup>1</sup>	R (red)	
		B (black) <sup>1</sup>		
		W (white) <sup>2</sup>		