

## ACIT2 LED Series

### Vaportite Unit

#### STANDARD



This fully weatherproof LED unit is designed for use in areas of wet location. Designed to withstand direct contact with rain this unit is corrosion resistant and waterproof. This unit is ideal in areas such as car washes, store fronts, parking garages, kitchens, and chemical plants. Vapor Tite unit is capable of being hosed down for easy cleanin

#### Construction:


- Exterior housing is designed for single piece injection molded fiberglass/plastic combination blend. Neoprene gasket and stainless steel pressure locks ensure waterproof seal. Interior gear tray is heavy gauge die formed steel which hinges to allow electrical raceway access while remaining attached to luminaire housing during installation and maintenance.

#### ELECTRICAL

All units are furnished with UL Listed Class P thermally protected driver. (120-277v) Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp and wet location

#### Mounting

Vapor Tite Unit available with an stainless steel external hanging bracket. VT Series is watertight and must be drilled and sealed for each surface mounting or chain hanging application.

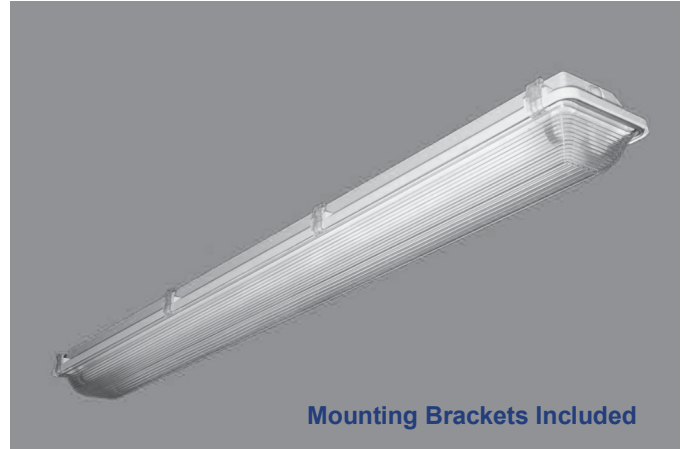


Mounting Brackets Included

#### WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp and wet location

#### DIMENSIONS



RF	20									
	80%				70%				50%	
RC	70	50	30	10	70	50	30	10	50	30
RW	70	50	30	10	70	50	30	10	50	30
0	109	109	109	109	107	107	107	107	101	101
1	98	93	89	84	95	91	86	83	86	83
2	89	80	73	67	86	78	72	66	74	69
3	81	70	62	56	78	68	61	55	65	59
4	74	62	53	47	71	60	52	46	57	51
5	67	54	45	39	65	53	45	38	50	43
6	61	48	39	33	59	47	39	33	45	38
7	56	43	35	29	54	42	34	28	40	33
8	52	39	30	25	50	38	30	24	36	29
9	48	35	27	21	46	34	25	21	32	25
10	44	31	24	19	43	31	23	18	30	23



#### Ordering Guide

Max weight = 15lbs / 48" 32lbs / 96"

#### ACIT2-LED

Series
--------

ACIT2-LED

Size
------

2 = 2FT  
 4 = 4FT  
 8 = 8FT

Lumens
--------

2FT  
 3166 (17W)  
 4350 (24W)  
 5470 (31W)  
 6452 (39W)

4FT  
 3220 (17W)  
 4480 (24W)  
 5705 (30W)  
 6910 (37W)  
 8640 (48W)  
 11797 (70W)

8FT  
 3220 (17W)  
 4480 (24W)  
 5705 (30W)  
 6910 (37W)  
 8640 (48W)  
 11797 (70W)  
 13820 (74W)  
 17280 (96W)  
 23594 (140W)

Color
-------

3K  
 35K  
 4K  
 5K

Options
---------

EMB= emergency ballast  
 REFS = Silver Reflector  
 OCC-E = External Occupancy  
 Sensor OCC-I = Internal Occupancy  
 Sensor BILEVEL= Bi-level system  
 SS= Stainless Steel Latch  
 POLY= Polycarb lens  
 FR = Frosted lens over LED boards

\*0-10v low voltage dimming  
 standard per fixture

\*Higher and custom lumen  
 packages available upon request