

EUCE-KFS

Undercabinet Economy Kelvin Field Selectable

STANDARD



FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide up to 196,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Available models provide from 334 to 1,543 nominal lumens.*
- 120 AC voltage (60Hz) is standard.
- Triac dimmable.
- Power factor > 90.
- Total harmonic distortion < 20%.
- Color rendering index > 90.
- Steel housing.
- Polycarbonate lens.
- Knockouts on sides and back simplify electrical connections.
- Keyhole slots provide for easy installation in new construction or retrofit applications.

* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.

ORDERING INFORMATION


Example: EUCE-24-KFS



WARRANTY & LISTINGS

- cULus listed for damp locations.
- Energy Star certified.
- Complies with FCC Part 15, class B.
- Complies with ANSI/IEEE C62.41.1-2002, surge immunity protection (2.5kV).
- 5-year warranty of all electronics and housing.

DIMENSIONS

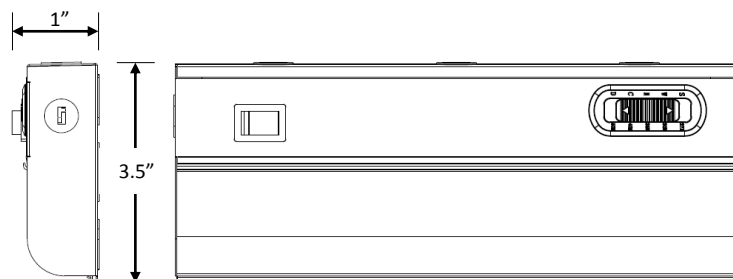

Series	EUCE-9	EUCE-12	EUCE-18	EUCE-21	EUCE-24	EUCE-33
Length	9"	12"	18"	21"	24"	33"
Weight (lbs)	0.80	1	1.30	1.60	1.70	2.40

Series	Length (in.)	Color Temperature
EUCE	9	KFS* 2700k 3000k 3500k 4000k 5000k
	12	
	18	
	21	
	24	
	33	
	42	

* Field selectable kelvin temperatures.

ELECTRICAL DATA

Series	Measurements	EUCE-9-KFS					EUCE-12-KFS				
		2700k	3000k	3500k	4000K	5000K	2700k	3000k	3500k	4000K	5000K
EUCE-KFS	Lumens	334	391	398	412	391	390	414	439	450	444
	Watts	5	5	5	5	5	5	5	5	5	5
	Efficacy	66	73	82	86	79	78	83	90	92	88
	Input Current (A)	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A

Series	Measurements	EUCE-18-KFS					EUCE-21-KFS				
		2700k	3000k	3500k	4000K	5000K	2700k	3000k	3500k	4000K	5000K
EUCE-KFS	Lumens	673	719	760	770	720	665	703	742	764	746
	Watts	9	9	9	9	9	9	9	9	9	9
	Efficacy	75	81	88	88	79	76	81	87	90	85
	Input Current (A)	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A

Series	Measurements	EUCE-24-KFS					EUCE-33-KFS				
		2700k	3000k	3500k	4000K	5000K	2700k	3000k	3500k	4000K	5000K
EUCE-KFS	Lumens	696	736	779	803	786	1064	1152	1214	1245	1202
	Watts	9	9	9	9	9	14	14	14	14	14
	Efficacy	76	82	88	91	86	76	84	90	91	85
	Input Current (A)	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.12A	120V = 0.12A	120V = 0.12A	120V = 0.12A	120V = 0.12A

Series	Measurements	EUCE-42-KFS				
		2700k	3000k	3500k	4000K	5000K
EUCE-KFS	Lumens	1315	1415	1514	1543	1488
	Watts	18	18	18	18	18
	Efficacy	72	79	87	88	82
	Input Current (A)	120V = 0.15A	120V = 0.15A	120V = 0.15A	120V = 0.15A	120V = 0.15A