

Job Name:	
Type:	
Part #:	
Notes:	

# **EPELX**

# **Economy Plastic Edgelit Exit Sign**

# **ILLUMINATION**

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized acrylic edgelit panel provides consistent, uniform illumination.
- Universal Single/Double face utilizes factory installed silver mylar background panel and stick-on mylar sheet.

#### **ELECTRICAL**

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green - normal, Red - check battery).

# **HOUSING**

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white, black or silver powder-coated finishes.
- Thermoplastic recessed-mount trim assembly is easily detachable from below, providing access to the housing. Available in white, black or silver powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.

#### **MOUNTING**

- Plastic mounting canopy included for top, end or back mount of the Surface-version sign.
- Accessory offered (order separately) for a quick surface to recessed mount conversion in the field
- Bar hangers included with Recessed-version for drywall or drop ceiling mount installations.





#### **ELECTRICAL INFORMATION**

CATALOG NUMBER	INPUT W	ATTS (W)	INPUT A	MPS (A)
	120V	277V	120V	277V
EPELX	1.3	1.3	0.17	0.17

#### WARRANTY / LISTING

- Five year warranty on all electronics and housing.
   Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C − 50°C).
- · Certified to CEC under Title 20 Regulations.

# STANDARD









# ORDERING INFORMATION

Sample Part Number: EPELXRMWEM


MODEL	N	o. of FACES	LE	TTER COLOR		PANEL	HOU	SING COLOR	BATTI	ERY	ACCESSOR	IES (order separately)
EPELX	(blank)	Universal Single/Double Face	R G RG	Red Green Red/Green	М	Mirror	W B S	White Black Silver	(blank) EM	AC-Only  Battery  Backup	PREL-KIT	Recessed-mount Conversion kit



Type:		
Part #:		

# **DIMENSIONS**

Recessed-mount version:

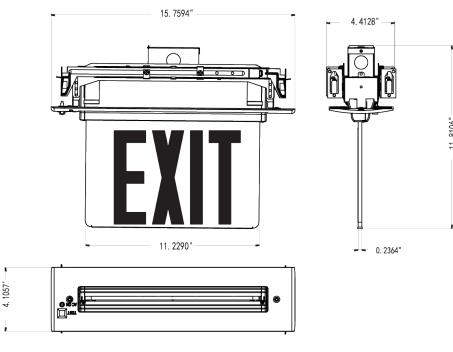

Surface-mount version:

