

## EWLCEM

### Low-profile Wet location Exit & Emergency Combo

#### ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0W (1 LEDs x 1.0 watt) per head.
- Adjustable LED lamp heads provide up to 18-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

#### ELECTRICAL

- Dual 120/277 voltage.
- Unique LED indicator light alerts occupant on battery condition (red-normal, Off-check battery).
- 3.6V long life, maintenance free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lampheads for minimum 90-minute emergency illumination.
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Charge rate/power "on" LED indicator light and push-to-test switch for mandated code compliance testing.

#### HOUSING

- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

#### MOUNTING


- Polycarbonate mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount.

#### OPTIONS

- CW: Optional high capacity battery for extreme cold temperature applications (-20°C – 50°C).
- RC: Remote capacity of up to 2.0 watts.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.




#### DIMENSIONS

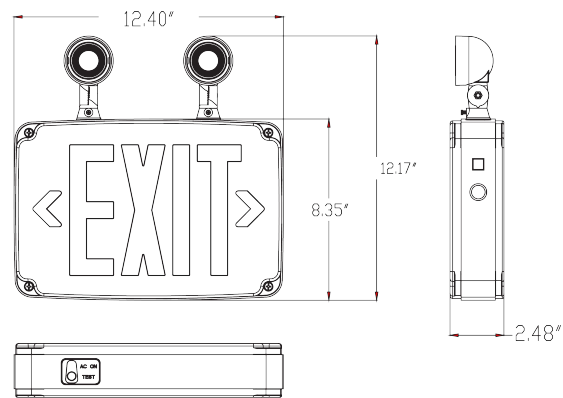

#### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

#### STANDARD



#### OPTIONAL



#### ORDERING INFORMATION

Sample Part Number: EWLCEM

PART#	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
EWLCEM	1 Single Face	RG Red/Green (Field-selectable)	W White B Black G Gray (with white faceplate)	CW Cold Weather <sup>1</sup>
	2 Double Face			RC Remote Capacity <sup>1</sup>
	(blank) Universal Single/Double Face			TP Tamper Proof Screws

Note:  
<sup>1</sup> Not available together

2025.06

## ELECTRICAL INFORMATION

PART#	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EWLCM	1.1	1.1	0.12	0.12

## REMOTE LAMP COMPATIBILITY

PART#	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY	
			RHLED	MRHLED
EWLEM-RC	3.6V	2.0W	x	x