

## ESXTEU

### Steel Exit Sign

#### ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

#### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

#### HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout Chevron directional indicators.

#### OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.


#### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

| STANDARD   |   |   | OPTIONAL  |   |
|--|---|---|---|---|
|  |  |  |  |  |



#### DIMENSIONS

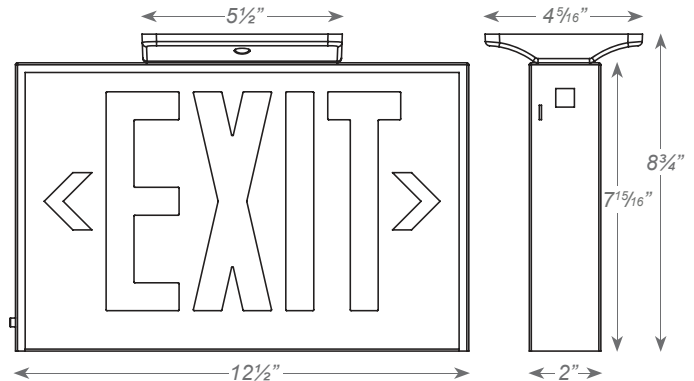

#### ELECTRICAL INFORMATION

| CATALOG NUMBER          | INPUT WATTS (W) |      | INPUT AMPS (A) |       |
|-------------------------|-----------------|------|----------------|-------|
|                         | 120V            | 277V | 120V           | 277V  |
| ESXTEU-RED/GREEN/EM/SDT | 3.8             | 3.8  | 0.034          | 0.020 |

#### ORDERING INFORMATION

Sample Part Number: **ESXTEU2RWEM**

| MODEL  | No. of FACES |                                  | LETTER COLOR |              | HOUSING COLOR |                | BATTERY       |                              | OPTIONS |                               |
|--------|--------------|----------------------------------|--------------|--------------|---------------|----------------|---------------|------------------------------|---------|-------------------------------|
| ESXTEU | 2            | Universal Single/<br>Double Face | R<br>G       | Red<br>Green | W<br>B        | White<br>Black | (blank)<br>EM | AC-Only<br>Battery<br>Backup | SDT     | Self-Diagnostics <sup>1</sup> |

<sup>1</sup> Available only with EM units.